


High-temperature aluminium tape TAT 50/50

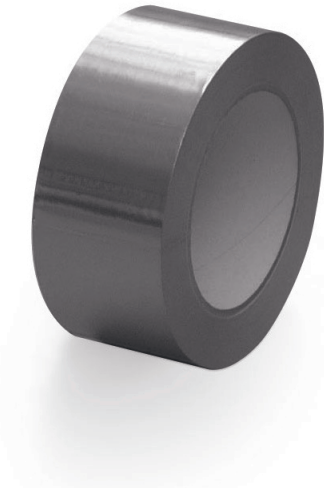

Description

Aluminium sealing tape with a thickness of 50 microns. With its high temperature resistance, it can be used in ventilation cap application


Note: For tapes retained their adhesive properties should be kept at about 21°C and should not exceeding 50%. It must be protected from sunlight.

Example identification

Product code: **TAT 50 - 50**

type	_____
width	_____
length	_____

Dimensions

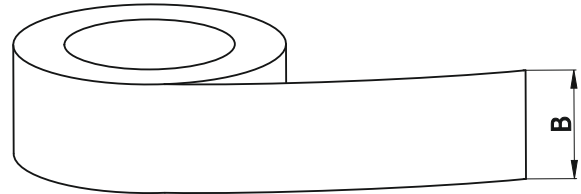

Code	width B [mm]	length [mb]	packaging [pcs]	temp [°C]
TAT 50/50	50	50	24	350

Technical Data

Property	Unit	Value	Test Method
Backing Thickness	Micron	50	PSTC-33 / ASTM D3652
Peel Adhesion	N/25mm	18	PSTC-1 / ASTM D3330
Tack Rolling Ball	cm	20	PSTC-6 / ASTM D121
Tensile Strength	N/25mm	70	PSTC-31 / ASTM D3759
Elongation	%	3.5	PSTC-31 / ASTM D3759
Fire Rating	(25 / 50 & Class O)	Passed	UL 723 & BS476 Pt 6 & 7
Service Temperature	°C	-30 ≈ +350	-
Applying Temperature	°C	+10 ≈ +40	-